



"Out Shines All Others"

PULSABLE IR SOURCE

Model EP-3872*

Helioworks, Inc. offers a unique steady state infrared emitter with a tungsten filament that provides mid IR radiation to over 5 microns. It operates in pulsed or steady state mode at temperatures in excess of 1900° K in an industry standard TO-8 package.





Key features include:

- Tungsten Filament
- Operates in Pulsed or Steady State Mode
- Internal Gold Plated Parabolic Reflector
- Sapphire Window
- Standard TO-8 Package
- 3 year Lifetime

Electrical Specifications:


Peak Voltage = 2.2 Volts MAXIMUM
 Peak Current = 1.1 Amps
 Peak Power = 2.4 Watts
 Voltage measured at base of header

*Patented

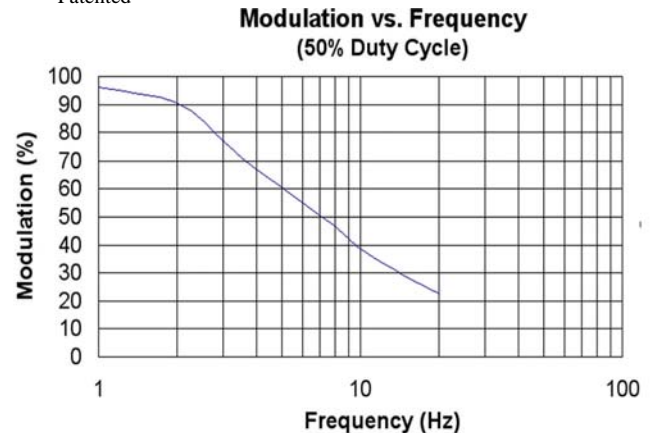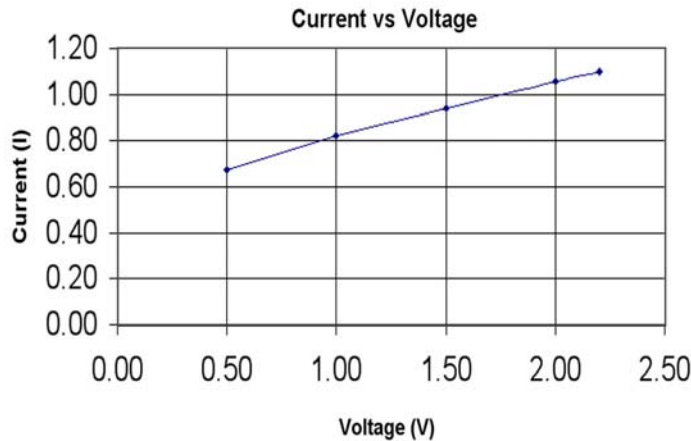

Radiant Intensity (Watts/CM2):

Volts = 3.0, Distance = 3.0 inches from source

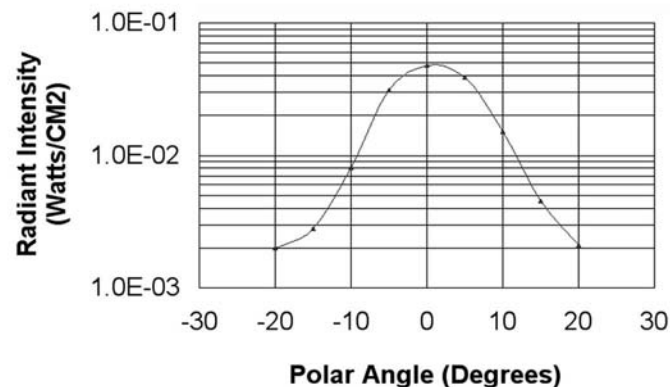

Polar Angle	Average (Watts/CM2)
-20	2.00E-03
-15	2.80E-03
-10	8.00E-03
-5	3.10E-02
0	4.75E-02
5	3.90E-02
10	1.50E-02
15	4.50E-03
20	2.10E-03