



HELIOWORKS
"Out Shines All Others"
STEADY STATE IR SOURCE
Model EK-8522

Helioworks offers a unique steady state infrared emitter for the mid IR spectrum that operates at up to 950° Centigrade in an industry standard TO-8 package. The calcium fluoride window provides spectral transmission to over 9 microns




Key features include:

- Kanthal Filament with Emissivity of 0.7
- Calcium Flouride Window
- Internal Gold Plated Parabolic Reflector
- Standard TO-8 Package
- Inert Gas Backfill
- 3 Year Lifetime

Electrical Specifications:

Peak Voltage = 3.0 Volts DC MAXIMUM
 Peak Current = 1.48 Amps
 Peak Power = 4.4 Watts
 Voltage measured at base of header
 Package temperature must not exceed 100° C

Current vs. Voltage

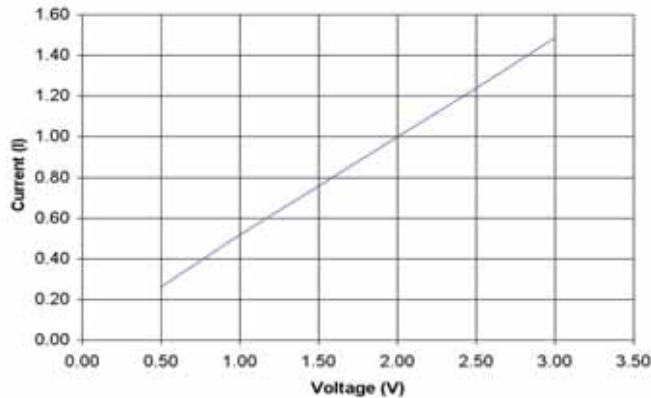


V	I	W=VI	R=V/I
0.50	0.26	0.13	1.90
1.00	0.52	0.52	1.92
1.50	0.76	1.14	1.97
2.00	1.00	2.00	2.00
2.50	1.24	3.10	2.02
2.80	1.39	3.89	2.01
3.00	1.49	4.47	2.01

Approximate 950° C

Radiant Intensity (Watts/CM2):

Volts = 3.0, Distance = 3.0 inches from source

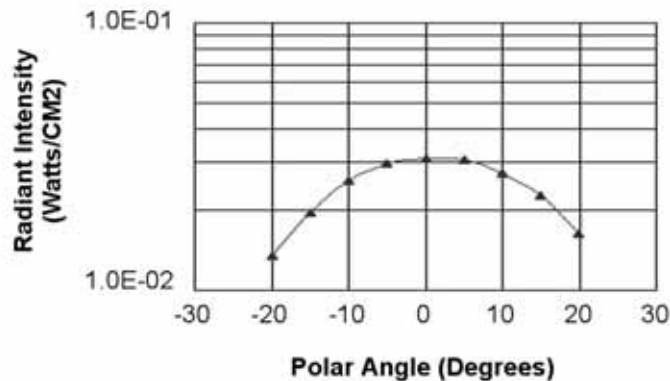

Polar Angle	Average (Watts/CM2)
-20	1.35E-02
-15	1.95E-02
-10	2.58E-02
-5	2.98E-02
0	3.10E-02
5	3.09E-02
10	2.75E-02
15	2.28E-02
20	1.63E-02